



SCANDIA MOSS CARE GUIDE

Please take the moss out of the box carefully to avoid damage.


Installing your moss panel(s)

The moss is mounted onto a cork backing. This is flexible and easy to cut, making it simple to adapt to your required shape and size. Avoid tearing moss away from the cork backing.

There are a number of ways to fix the moss panel. Below are our recommendations to keep your moss secure and looking its best:

1 Silicone (Simple) Silicon sticks to any surface for as long as required. For an even stronger grip combine silicone with strong double-sided tape, especially if the mounting surface is rough.


Silicone

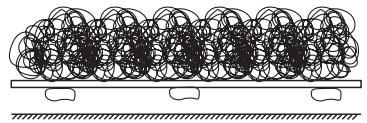

2 Strong Double-Sided Tape (Quick)


A speedy way of attaching your moss is with strong double-sided tape. If you're installing onto a rough surface like concrete then we recommend using 3M double-sided tape.

Double Sided Tape

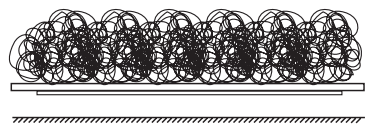

3 Screws (Durable) To fix the moss to a wall we recommend using screws.

Screws

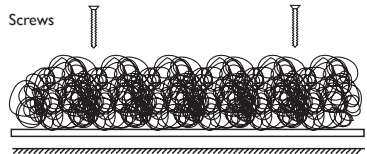

Caring for your moss panel

- This moss panel is suitable for indoor use only.
- For best results, position out of direct sunlight to prevent fading.
- Avoid immersing in water.
- Gently clean the moss using a feather duster on the surface. Do not use water or cleaning products, including detergents, as this could damage the moss. Do not Hoover.
- If the humidity in the room drops below 30%, the moss will become brittle and mustn't be touched. When the humidity level returns to 30-40% the moss will become soft again.
- Keep out of the reach of children - small parts can cause a choking hazard if accidentally swallowed.